



# Less is more: modelling polymers in turbulent flows

Emily S.C. Ching<sup>†</sup>

Department of Physics, The Chinese University of Hong Kong, Shatin, Hong Kong

(Received 7 June 2024; accepted 14 June 2024)

Adding polymers to turbulent Newtonian fluid flows can have dramatic effects. A well-known example is a significant drag reduction by flexible polymers in turbulent wall-bounded flows. In numerical studies of polymer drag reduction, polymers are often modelled as dumbbells of two beads connected by a finitely extensible nonlinear elastic (FENE) spring. There are natural queries whether this highly simplified coarse-grained model is adequate for describing a polymer macromolecule in turbulent flows. By carrying out Eulerian–Lagrangian simulations of polymers, described by different models, in a turbulent pipe flow, Serafini *et al.* (*J. Fluid Mech.*, vol. 987, 2024, R1) have demonstrated that the FENE dumbbell model can accurately capture polymer extension statistics as compared with the realistic Kuhn chain model. Their work further reveals the surprising result that increasing the number of beads in a FENE chain worsens its accuracy in characterizing polymer spatial conformations at large Weissenberg numbers.

**Key words:** drag reduction, polymers

## 1. Introduction

The addition of a small amount of flexible polymers in turbulent flows of Newtonian fluids can alter the flow properties significantly. The most notable effect is a significant reduction in the friction drag. The phenomenon of turbulent drag reduction by polymers was discovered approximately 75 years ago by Toms, who observed a substantial reduction in drag by adding only 10 parts per million by weight of polymethyl methacrylate in a turbulent flow of chlorobenzene down a pipe while studying the degradation of polymers (Toms 1949). Similar effects have been observed in turbulent pipe or channel flows of water with polyethylene oxide or polyacrylamide (see, e.g. Virk 1975). This effect has since been used to reduce energy losses in the transportation of crude oil in the Trans Alaska

<sup>†</sup> Email address for correspondence: ching@phy.cuhk.edu.hk

pipeline system (Burger, Munk & Wahl 1982). Thus, understanding the polymer-flow interactions and the mechanisms leading to drag reduction is not only a fundamental scientific challenge but also important for technological applications.

Numerical simulations play a crucial role in advancing our understanding of polymer drag reduction. A reasonably realistic model for flexible polymer chains is the Kuhn chain, which is a freely jointed chain of  $N$  beads and  $N - 1$  rod-like links with the length  $l$  of each link taken as the Kuhn length  $l_K \equiv r_{eq}^2/L$ , where  $r_{eq}$  is the root-mean-square end-to-end distance and  $L$  the contour length of the polymer (Doi & Edwards 1988). Coarse-grained models, known as bead-spring models, are obtained by replacing the rods of a freely jointed chain with one or more entropic springs. The bead-spring model with  $N = 2$  beads connected by a finitely extensible nonlinear elastic (FENE) spring (Bird *et al.* 1987) is called the FENE dumbbell model. Using the FENE dumbbell model and kinetic theory, continuum models of dilute polymer solutions can be obtained (Bird, Dotson & Johnson 1980). Specifically, the constitutive equation relating the polymer stress tensor to the polymer conformation tensor and the evolution equation of the polymer conformation tensor have been derived using Peterlin's approximation (Peterlin 1966). The resulting FENE-P model has been widely used in numerical studies and has captured the qualitative behaviour of polymer drag reduction found in experiments although quantitative agreement requires unphysical parameters such as unrealistically high polymer concentrations (Sureshkumar, Beris & Handler 1997; De Angelis, Casciola & Piva 2002). Moreover, various numerical difficulties of the continuum FENE-P model have been known (Vaithianathan & Collins 2003) and the Peterlin approximation has been shown to give rise to artifacts in turbulent flows when the Weissenberg number (the ratio of polymer relaxation time to fluid time scale),  $Wi$ , is large (Vincenzi *et al.* 2015). Lagrangian simulations of FENE dumbbells coupled with the turbulent flow of a Newtonian solvent (carrier fluid), generated by direct numerical simulation of incompressible Navier–Stokes equations, can overcome these numerical difficulties and problems (Peters & Schumacher 2007; Watanabe & Gotoh 2013). Such a hybrid Eulerian–Lagrangian numerical simulation (Serafini *et al.* 2022) of a turbulent flow coupled with DNA macromolecules modelled by FENE dumbbells with realistic parameters indeed shows significant drag reduction at sufficiently large  $Wi$ .

## 2. Overview

Real polymers have many internal degrees of freedom and a broad spectrum of relaxation time scales whereas the FENE dumbbell model is a highly simplified coarse-grained model and can only represent the longest relaxation time of the polymer. Extra degrees of freedom can be introduced by adding beads and springs, and this gives rise to a multibead FENE chain of  $N$  beads connected by  $N - 1$  FENE springs (which reduces to the FENE dumbbell when  $N = 2$ ). Using Eulerian–Lagrangian simulations, Serafini *et al.* (2024) have studied the dynamics of polymers, described by different models, in a turbulent pipe flow at a moderate friction Reynolds number and different  $Wi = \tau/(r/U_b)$ . The different models of polymers used are the Kuhn chain, FENE dumbbells and multibead FENE chain with  $N > 2$ , and freely jointed chain with  $N \leq 101$ . Here,  $\tau$  is the polymer relaxation time,  $r = 0.5$  mm is the radius of the pipe,  $U_b = Q/(\pi r^2)$  is the bulk velocity, and  $Q$  is the volumetric flow rate. A small population of  $10^5$  polymers has been used and the back reaction of the polymers to the flow is ignored. In their simulations, they chose  $L = 0.04r$  and  $l_K = 2 \times 10^{-4}r$  to mimic a double-stranded DNA macromolecule with  $\tau \approx 1$  s (Harnau & Reineker 1999), which match those used in an experimental study of turbulent drag reduction (Choi *et al.* 2002). With these values, it can be found that

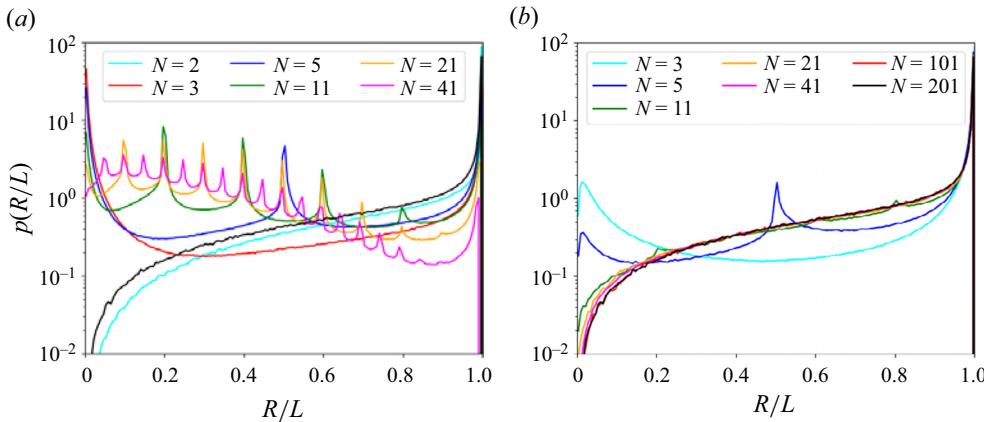


Figure 1. Distribution  $p(R/L)$  of the normalized end-to-end distance for (a) multibead FENE chain with  $N \geq 2$  and the Kuhn chain (solid black line) and (b) freely jointed chain ( $N = 201$  for the Kuhn chain). Compilation from figures 2(a) and 5 in Serafini *et al.* (2024).

$N = 201$  for the Kuhn chains. The maximum extension of the spring for the multibead FENE chains and the constant rod length for the freely jointed chains with general  $N$  are chosen to maintain the same contour length  $L$ .

Figure 1 shows the distributions  $p(R/L)$  of the end-to-end distance  $R$  normalized by  $L$  for the different models at  $Wi = 10^4$ . The distribution for the FENE dumbbell ( $N = 2$ ) is close to that for the realistic Kuhn chain. Increasing the number of beads in a FENE chain worsens its accuracy in characterizing polymer spatial conformations. A multibead FENE chain with  $N > 2$  has a larger chance of folding up compared with the reference Kuhn chain thus overestimates the probability of folded configurations leading to spurious peaks in  $p(R/L)$  (see figure 1a). Together with earlier findings that the polymer extension and polymer stresses statistics are insensitive to the number of beads of a multibead FENE chain (Jin & Collins 2007; Watanabe & Gotoh 2010; Vincenzi *et al.* 2020) in isotropic turbulence at moderate  $Wi$ , these results for turbulent pipe flows at large  $Wi$  establish that the FENE dumbbell is a better model than a multibead FENE chain with  $N > 2$  for studying polymer drag reduction. For the freely jointed chains,  $p(R/L)$  converges as  $N$  is increased and the results for  $N \geq 21$  are almost indistinguishable (see figure 1b). Thus, a 21-bead freely jointed chain model would be a good choice for probing internal configurations of polymers at large  $Wi$ .

### 3. Relevance and outlook

Understanding polymer–turbulence interactions and polymer drag reduction is highly challenging because of the wide range of length and time scales involved. Numerical simulation has been a major and important tool for addressing this challenge. The choice of what polymer model to use in numerical studies of polymer drag reduction depends on the balance between the accuracy of the model in capturing the essential details of real polymers and computational cost and feasibility. The work of Serafini *et al.* (2024) has provided strong support that the highly simplified FENE dumbbell model is a reasonable choice. With this relatively simple model, efforts can then be focused to fully understand polymer–turbulence interactions.

In a recent Eulerian–Lagrangian simulation of a turbulent pipe flow of a dilute solution of polymers, modelled by FENE dumbbells with realistic physical parameters, the same

authors (Serafini *et al.* 2022), showed that at  $Wi = 10^4$ , there is a significant drag reduction, and the drag reduction is due entirely to the back-reaction of fully stretched polymers. Moreover, the polymer stress resulted from this back-reaction force can be expressed in terms of some effective viscosity that depends on the local concentration of the polymers. It is important to check the generality of this physical picture by expanding the range of  $Wi$  in numerical investigations since the relaxation time of drag reducing polymers varies a great deal depending on the molecular weights and specific types of polymers. Another interesting problem is to study the flow-dependent and thus space-dependent effective viscosity of the polymers, extracted from the polymer back-reaction force, and test whether it can explain the drag reducing effects of polymers in the same spirit as previously proposed in a phenomenological theory (Benzi *et al.* 2006; Procaccia, L'vov & Benzi 2008).

**Declaration of interest.** The author reports no conflict of interest.

**Author ORCID.**

✉ Emily S.C. Ching <https://orcid.org/0000-0001-5114-5072>.

#### REFERENCES

- BENZI, R., DE ANGELIS, E., L'VOV, V.S., PROCACCIA, I. & TIBERKEVICH, V. 2006 Maximum drag reduction asymptotes and the cross-over to the Newtonian plug. *J. Fluid. Mech.* **551**, 185.
- BIRD, R.B., DOTSON, P.J. & JOHNSON, N.L. 1980 Polymer solution rheology based on a finitely extensible bead-spring chain model. *J. Non-Newtonian Fluid Mech.* **7**, 213–235.
- BIRD, R.B., HASSAGER, O., ARMSTRONG, R.C. & CURTISS, C.F. 1987 *Dynamics of Polymeric Liquids*, vol. 2. Wiley.
- BURGER, E.D., MUNK, W.R. & WAHL, H.A. 1982 Flow increase in the Trans Alaska Pipeline through use of a polymeric drag-reducing additive. *J. Petrol. Tech.* **34**, 377–386.
- CHOI, H.J., LIM, S.T., LAI, P.Y. & CHAN, C.K. 2002 Turbulent drag reduction and degradation of DNA. *Phys. Rev. Lett.* **89**, 088302.
- DE ANGELIS, E., CASCIOLA, C.M. & PIVA, R. 2002 DNS of wall turbulence: dilute polymers and self-sustaining mechanisms. *Comput. Fluids* **31** (4–7), 495–507.
- DOI, M. & EDWARDS, S.F. 1988 *The Theory of Polymer Dynamics*. Oxford University Press.
- HARNAU, L. & REINEKER, P. 1999 Relaxation dynamics of partially extended single DNA molecules. *New J. Phys.* **9** (10), 360.
- JIN, S. & COLLINS, L.R. 2007 Dynamics of dissolved polymer chains in isotropic turbulence. *New J. Phys.* **9**, 360.
- PETERLIN, A. 1966 Hydrodynamics of macromolecules in a velocity field with longitudinal gradient. *J. Polym. Sci.* **4**, 287–291.
- PETERS, T. & SCHUMACHER, J. 2007 Two-way coupling of finitely extensible nonlinear elastic dumbbells with a turbulent shear flow. *Phys. Fluids* **19**, 065109.
- PROCACCIA, I., L'VOV, V.S. & BENZI, R. 2008 Colloquium: theory of drag reduction by polymers in wall-bounded turbulence. *Rev. Mod. Phys.* **80**, 225.
- SERAFINI, F., BATTISTA, F., GUALTIERI, P. & CASCIOLA, C.M. 2022 Drag reduction in turbulent wall-bounded flows of realistic polymer solutions. *Phys. Rev. Lett.* **129**, 104502.
- SERAFINI, F., BATTISTA, F., GUALTIERI, P. & CASCIOLA, C.M. 2024 Polymers in turbulence: any better than dumbbells? *J. Fluid Mech.* **987**, R1.
- SURESHKUMAR, R., BERIS, A.N. & HANDLER, R.A. 1997 Direct numerical simulation of the turbulent channel flow of a polymer solution. *Phys. Fluids* **9** (3), 743–755.
- TOMS, B.A. 1949 Some observations on the flow of linear polymer solutions through straight tubes at large Reynolds numbers. In *Proceedings of First International Congress on Rheology, Amsterdam*, vol 2, pp. 135–141. North Holland.
- VAITHIANATHAN, T. & COLLINS, L.R. 2003 Numerical approach to simulating turbulent flow of a viscoelastic polymer solution. *J. Comput. Phys.* **187**, 1–21.
- VINCENZI, D., PERLEKAR, P., BIFERALE, L. & TOSCHI, F. 2015 Impact of the Peterlin approximation on polymer dynamics in turbulent flows. *Phys. Rev. E* **92**, 053004.

*Less is more: modelling polymers in turbulent flows*

- VINCENZI, D., WATANABE, T., RAY, S.S. & PICARDO, J.R. 2020 Polymer scission in turbulent flows. *J. Fluid Mech.* **912**, A18.
- VIRK, P.S. 1975 Drag reduction fundamentals. *Am. Inst. Chem. Engrs J.* **21**, 625–656.
- WATANABE, T. & GOTOH, T. 2010 Coil-stretch transition in an ensemble of polymers in isotropic turbulence. *Phys. Rev. E* **81**, 066301.
- WATANABE, T. & GOTOH, T. 2013 Hybrid Eulerian–Lagrangian simulations for polymer-turbulence interactions. *J. Fluid Mech.* **717**, 535–575.