



## Bubbling forth on thin films

Jerome A. Neufeld<sup>1,2,3,†</sup>

<sup>1</sup>Institute for Energy and Environmental Flows, Madingley Road, Cambridge CB3 0EZ, UK

<sup>2</sup>Department of Earth Sciences, Bullard Laboratories, Madingley Road, Cambridge CB3 0EZ, UK

<sup>3</sup>Department of Applied Mathematics and Theoretical Physics, CMS Wilberforce Road, Cambridge CB3 0WA, UK

(Received 10 September 2024; accepted 10 September 2024)

The motion of a bubble of negligible viscosity, such as air, forced down a tube filled with a viscous fluid which wets the walls of the tube has become a classic of the fluid dynamical literature. The differential motion of the bubble and the fluid are determined by the thin film which surrounds the bubble, whose shape and thickness are set by the interplay between gradients in surface tension and viscous shear stresses. Bretherton (*J. Fluid Mech.*, vol. 10, issue 2, 1961, p. 166) provided a first, clear mathematical analysis in the lubrication limit coupled with carefully constructed experimental confirmation of the thin films deposited by a bubble moving in the confining geometry of the capillary tube. Its lasting impact has been not only in the migration of bubbles, but in a host of related fluid dynamical, industrial, biological and environmental processes for which thin lubricating films on the sometimes convoluted geometries of complex microstructures, such as porous media, determine the large-scale behaviour.

**Key words:** blood flow, bubble dynamics, thin films

### 1. Introduction

The Bretherton bubble, as the phenomenon is often referred, is the displacement of a viscous fluid by a long bubble of negligible viscosity through a regular tube. While this rather simple configuration was initially used to infer the flux of viscous fluid through a small capillary tube, it is the contribution by Bretherton (1961) to understanding the thickness of the film deposited during the transit of the bubble which has generated lasting and significant impact.

As the bubble is driven down the tube, some of the viscous fluid displaced is left on the walls due to the boundary condition at the solid–liquid interface. In being forced through the confines of the channel, the bubble is deformed from an otherwise static hemispherical shape into an elongated bubble separated from the solid by thin liquid films, and it is the

† Email address for correspondence: [jn271@cam.ac.uk](mailto:jn271@cam.ac.uk)

surface tension acting on the liquid–air interface that resists this flow-driven deformation. Hence, it is the competition of viscous and capillary forces which ultimately sets the thickness of the deposited film (Aussillous & Quéré 2000).

Bretherton’s approach to determining the film thickness, and hence the speed of the bubble, was twofold, hewing to what has become long tradition in the *Journal of Fluid Mechanics*. First, Bretherton formulated a mathematical model of the physical balance between surface tension and viscous forces to predict the profile of the thin film deposited, as characterised by the dimensionless ratio of viscous to capillary forces known as the capillary number,

$$Ca = \frac{\mu U}{\sigma}, \quad (1.1)$$

written here in terms of the viscosity of the ambient fluid  $\mu$ , the measurable velocity of the bubble  $U$  and the surface tension  $\sigma$ . The film thickness  $b$  was written in the form  $b = rf(Ca)$ , where  $r$  is the tube radius. Second, having identified the key physical balance, Bretherton re-designed a new apparatus and performed additional experiments with a much higher level of detail and repeatability which helped confirm his theoretical insights for  $Ca \ll 1$ .

An elegant review of the scaling of this physical balance (Quéré 1999; Aussillous & Quéré 2000) matches the viscous stresses across the thin film, with gradients in the capillary pressure  $\Delta p \sim \sigma/r$  on a length scale  $l$  so that

$$\frac{\mu U}{b^2} \sim \frac{\Delta p}{l} = \frac{\sigma/r}{l}. \quad (1.2)$$

The length scale over which the film deforms is found by matching the static and dynamic menisci,

$$-\frac{\sigma}{r} \sim -\frac{\sigma b}{l^2}, \quad (1.3)$$

and hence the film thickness is given by

$$\frac{b}{r} = c Ca^{2/3}, \quad (1.4)$$

with the constant  $c$  determined by Bretherton’s analysis (described below).

It is worth noting that the deposition of a thin film on a tube, and the interplay between viscous and capillary forces are reproduced (inside out) when a solid is withdrawn from a bath of fluid. In earlier comparable work, Landau & Levich (1942) and Derjaguin (1943) considered the coating of film left on a plate as it is withdrawn from a bath of fluid and derived the now textbook result that the thickness of the coating on a withdrawn object  $b \sim Ca^{2/3}$  (Quéré 1999).

## 2. A combination of approaches

A significant longstanding impact of Bretherton (1961) is the clarity of the asymptotic analysis used to model films surrounding the bubble. For sufficiently small  $Ca \ll 1$ , and where both gravity and inertia are negligible, the variations in the film surrounding the bubble occur on a length scale much larger than the film thickness ( $b \ll l$  in the scaling argument above). Hence, a lubrication model can be posed balancing the viscous shear across the thin film with lateral gradients in the Laplace pressure, as described by the

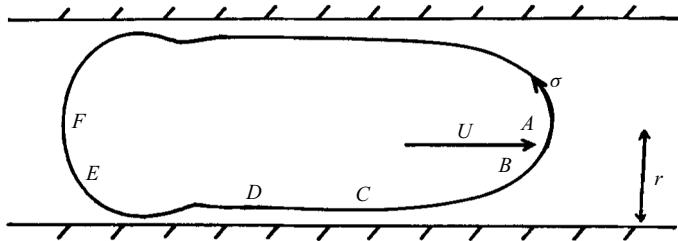


Figure 1. The original sketch of the Bretherton (1961) bubble, showing the quadratic nose in region  $A \rightarrow B$ , thin film in region  $D \rightarrow C$  and trailing oscillatory film in region  $E$ .

scaling in (1.2). Two limits are important in solving this model. At the centre of the bubble is the unknown, but nearly constant, minimum film thickness  $b_0$  (region  $C \rightarrow D$  in figure 1), which provides one model constraint. At the head of the bubble, where  $b \gg b_0$ , the curvature of the film, and hence the capillary pressure, assume a constant value (the film thickness is quadratic), providing the second model constraint. Note that by symmetry, the curvature of the bubble must be constant (though potentially different) at the front and the back. Finally, the origin is arbitrary ( $x = 0$  in figure 1), providing the final model constraint. With these three constraints, imposed through an asymptotic analysis of the lubrication model, Bretherton (1961) found that the constant  $c \simeq 0.643$  in (1.4), thus providing a quantitative prediction of the film thickness.

Experimentally, it is a challenge to directly measure the thickness of the lubricating film on either side of the bubble. Rather than directly measure the film thickness, it is found that the speed of the bubble  $U$  exceeds the speed of the fluid by an amount  $UW$ , where mass conservation requires and the result of the film model predicts that  $W = 1.29(3Ca)^{2/3}$ .

The fundamental observable is therefore the excess velocity of the bubble with respect to the fluid. Bretherton (1961) provided a new and extraordinarily careful set of experiments which clearly demonstrate a convincing agreement with the lubrication theory for  $10^{-4} < Ca < 10^{-2}$ . While this agreement is very encouraging, characteristically, it is the discussion of the discrepancies between theory and experiment for very small  $Ca$  that is most informative. Here, Bretherton intuits many of the challenges and opportunities of the coming decades, describing for example the role of surface roughness (Chen 1986), or of surface contaminants on the variability of the surface tension or indeed the action of the disjoining pressure for particularly thin films (de Gennes 1985; Israelachvili 1985). Concurrent to Bretherton's theoretical and experimental work, Taylor (1961) extended these experiments to much higher  $Ca \sim 1$ , a regime where inertia becomes important (Aussillous & Quéré 2000). Likewise, direct extensions of the original problem to understand the effect of the viscosity of the bubble have been investigated and found to modify only the numerical prefactor (Hodges, Jensen & Rallison 2004).

Finally, Bretherton (1961) extended both the theoretical analysis described above and the experimental investigation to study the rise of a bubble in a vertical tube. Here, the influence of gravity provides a balance between hydrostatic pressure and surface tension in the head and tail of the bubble where viscous forces are subdominant.

### 3. The long-lived impact of fundamental studies

The flow of the Bretherton bubble and the modelling approach so carefully described has played an important part in our understanding of flows at the smallest scales. The work has had a long lasting influence in designing and manipulating the flow of fluids at the smallest

scales in microfluidic devices and it now includes, for example, the effects of surfactants, the flow of complex fluids and external drivers such as electrokinetics (Stone, Stroock & Ajdari 2004).

The flow of a deformable bubble in a capillary tube has also spurred a large volume of related work in biological fluid dynamics, often associated with the flow of deformable blood cells in the deformable capillaries (Lighthill 1968; Secomb *et al.* 1986; Skalak, Ozkaya & Skalak 1989) or of airflow in and out of the lungs (Hazel & Heil 2003). Here again, the lubrication analysis described for a single bubble in a rigid capillary tube has been accommodated to incorporate the elastic pressure due to deformation of the elastic walls of the biological capillary, and the deformation of the blood cell as it transits the body.

The work of Bretherton also fits into a larger suite of fundamental problems in the flow of fluids in confined spaces. In an earlier classical work by Saffman & Taylor (1958), when a less viscous fluid is driven into a narrow gap (a Hele-Shaw cell) filled with a more viscous ambient, the interface is unstable to the formation of fingers. The process is an analogue for the instability of flows in porous media, with the resultant fingers sharing many hydrodynamic aspects with the single Bretherton bubble. Such studies have long formed the basis of modern work which seeks to understand the distribution of fluids in complex porous media (Zhao, MacMinn & Juanes 2016). In Bretherton's introduction, it is also interesting to note the statement that motion of the bubble contacting the sidewalls, and therefore 'filling the tube cross-section would involve infinite viscous stresses at the wall'. This statement alludes to the paradox of viscous stresses at a moving contact line so elegantly discussed by Huh & Scriven (1971) and which has generated a significant literature of its own (de Gennes 1985; Bonn *et al.* 2009).

Like a number of similar papers in early volumes of the *Journal of Fluid Mechanics*, the power and influence of Bretherton's work on the bubble in the tube is derived both from the simplicity and insight of the analysis and experimental observations. At a fundamental level, many subsequent works have extended the lubrication analysis in similar geometries, taking into account the variations in surface tension, the flexibility of the conduit walls or indeed by replacing the bubble with a deformable elastic capsule. Yet it is perhaps in the critical discussion of the results that Bretherton most clearly intuits major areas for fruitful fluid dynamical enquiry, many of which have subsequently filled the pages of this journal.

**Acknowledgements.** The author thanks A. Juel and A. Hazel for insightful comments on the manuscript, and J. Lawless for the image used in the graphical abstract.

**Declaration of interests.** The author report no conflict of interest.

**Author ORCIDs.**

 Jerome A. Neufeld <https://orcid.org/0000-0002-3284-5169>.

REFERENCES

- AUSSILLOUS, P. & QUÉRÉ, D. 2000 Quick deposition of a fluid on the wall of a tube. *Phys. Fluids* **12** (10), 2367–2371.
- BONN, D., EGGLERS, J., INDEKEU, J., MEUNIER, J. & ROLLEY, E. 2009 Wetting and spreading. *Rev. Mod. Phys.* **81** (2), 739–805.
- BRETHERTON, F.P. 1961 The motion of long bubbles in tubes. *J. Fluid Mech.* **10** (02), 166–188.
- CHEN, J.-D. 1986 Measuring the film thickness surrounding a bubble inside a capillary. *J. Colloid Interface Sci.* **109** (2), 341–349.
- DERJAGUIN, B.V. 1943 On the thickness of the liquid film adhering to the walls of a vessel after emptying. *Acta Physicochim.* **20**, 349–352.
- DE GENNES, P.G. 1985 Wetting: statics and dynamics. *Rev. Mod. Phys.* **57** (3), 827–863.

- HAZEL, A.L. & HEIL, M. 2003 Three-dimensional airway reopening: the steady propagation of a semi-infinite bubble into a buckled elastic tube. *J. Fluid Mech.* **478**, 47–70.
- HODGES, S.R., JENSEN, O.E. & RALLISON, J.M. 2004 The motion of a viscous drop through a cylindrical tube. *J. Fluid Mech.* **501**, 279–301.
- HUH, C. & SCRIVEN, L.E. 1971 Hydrodynamic model of steady movement of a solid/liquid/fluid contact line. *J. Colloid Interface Sci.* **35** (1), 85–101.
- ISRAELACHVILI, J.N. 1985 *Intermolecular and Surface Forces*. Academic Press.
- LANDEAU, L.D. & LEVICH, B. 1942 Dragging of a liquid by a moving plate. *Acta Physicochim.* **17**, 42–54.
- LIGHTHILL, M.J. 1968 Pressure-forcing of tightly fitting pellets along fluid-filled elastic tubes. *J. Fluid Mech.* **34** (1), 113–143.
- QUÉRÉ, D. 1999 Fluid coating on a fiber. *Annu. Rev. Fluid Mech.* **31** (1), 347–384.
- SAFFMAN, P.G. & TAYLOR, G.I. 1958 The penetration of a fluid into a porous medium or Hele-Shaw cell containing a more viscous liquid. *Proc. R. Soc. Lond.* **245** (1242), 312–329.
- SECOMB, T.W., SKALAK, R., OZKAYA, N. & GROSS, J.F. 1986 Flow of axisymmetric red blood cells in narrow capillaries. *J. Fluid Mech.* **163**, 405–423.
- SKALAK, R., OZKAYA, N. & SKALAK, T.C. 1989 Biofluid mechanics. *Annu. Rev. Fluid Mech.* **21** (1), 167–200.
- STONE, H.A., STROOCK, A.D. & AJDARI, A. 2004 Engineering flows in small devices. *Annu. Rev. Fluid Mech.* **36** (1), 381–411.
- TAYLOR, G.I. 1961 Deposition of a viscous fluid on the wall of a tube. *J. Fluid Mech.* **10** (2), 161–165.
- ZHAO, B., MACMINN, C.W. & JUANES, R. 2016 Wettability control on multiphase flow in patterned microfluidics. *Proc. Natl Acad. Sci. USA* **113** (37), 10251–10256.